


NMC-PC1UCO2T-XXX-C-GY

NIKOMAX

1 , 110-RJ12/6P6C, LSZH, USOC,

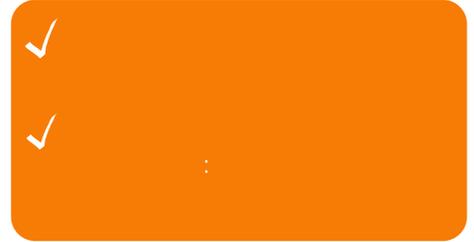

(-)


NMC-PC1UCO2T-XXX-C-GY
110

3,

USOC,
RJ12/6P6C -

110

0,5 5

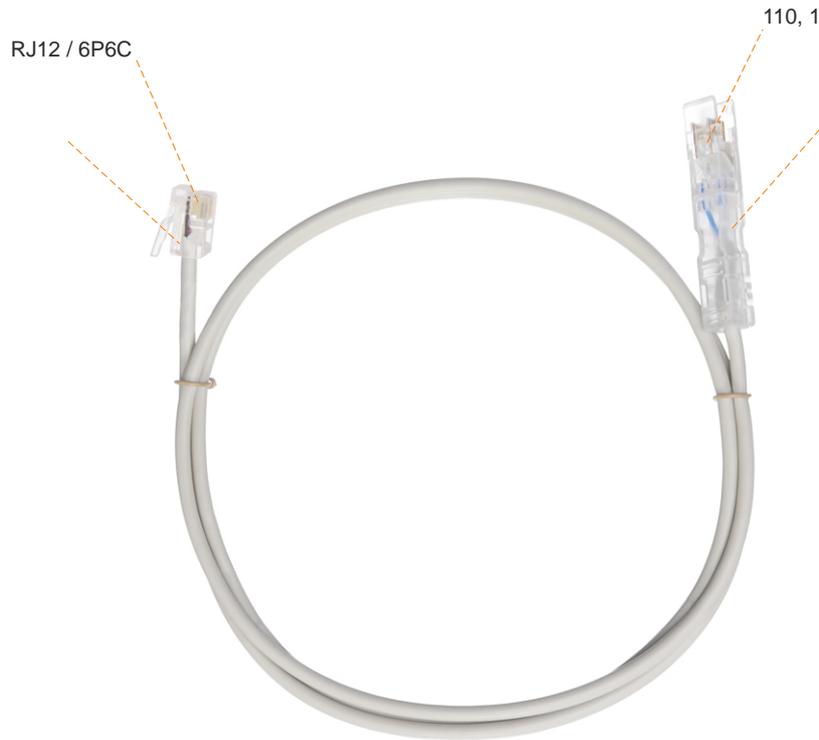

NMC-PC1UCO2T-XXX-C-GY

1

110: NMC-CB110-50NL, NMC-CB110-100NL,
NMC-CB110-50L, NMC-CB110-100L
110: NMC-RB110-100, NMC-RB110-200
110: NMC-CC110UD4-100, NMC-CC110UD5-100
: NMC-OV500-2, NMC-OV900-2
: NMC-OK400-2, NMC-OK600-2, NMC-OK800-2,
NMC-OP450-2, NMC-OP700C

	NMC-PC1UC02T-XXX-C-GY
	110 - RJ12/6P6C
	, 3-6
	USOC
	3
	16
	1
, AWG()	24 (7 0,186)
	(PE)
	0,95
	LSZH
	3,2
	-
	: ISO/IEC 11801, EN 50173, TIA/EIA 568
	10BASE-T, 100BASE-T4, ATM-25, ATM-51, TR-4
	-20 +60. -20 +50
	1
	-

					3	
NMC-PC1UC02T-005-C-GY	3	110 - RJ12/6P6C	USOC	0,5	0,000228	0,012
NMC-PC1UC02T-010-C-GY	3	110 - RJ12/6P6C	USOC	1	0,000285	0,021
NMC-PC1UC02T-015-C-GY	3	110 - RJ12/6P6C	USOC	1,5	0,000320	0,025
NMC-PC1UC02T-020-C-GY	3	110 - RJ12/6P6C	USOC	2	0,000355	0,036
NMC-PC1UC02T-030-C-GY	3	110 - RJ12/6P6C	USOC	3	0,000380	0,043
NMC-PC1UC02T-050-C-GY	3	110 - RJ12/6P6C	USOC	5	0,000570	0,082

